

Technical data sheet

GES R2 as an assembly kit

Item no. 7408845




Zn Die-cast zinc

Round GES R2 service outlet with hinged cover, floor covering protection frame and UD GES R2 screed socket for installation in floors with screed structures in internal areas. Installation unit with a double power socket with a 33° insertion direction. At the side, next to the socket, there is space for an optional two connection sockets for data technology applications. When closed, the installation unit can be wet-cleaned. The minimum installation depth is 85 mm. Chrome-plated surface.

Master data

Item no.	7408845
Type	GES R2 Cr V SFB
Description 1	Floor socket with hinged cover
Description 2	Cr, 2x VDE socket, screed box
Dimension	140x140x85
Material	Die-cast zinc
Material symbol	Zn
Smallest sales unit (VG)	1 Piece
Weight	308,00 kg/100 pc.

Technical data

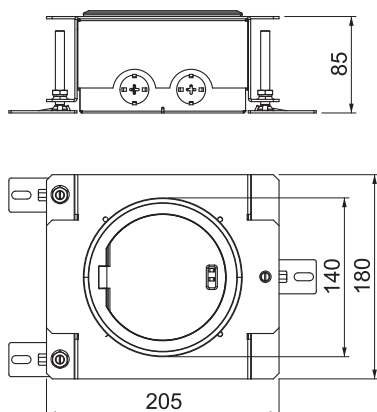

External diameter	140,00 mm
Installation diameter	122
Floor care	Wet
Installation depth	85,00 mm
Screed height	85-130 mm
Floor height	85-130 mm
Standard	EN 50085-2-2
Opening mechanism	Locking slider
Frame version	Carpet protection frame
Protection rating (IP) when used	IP20
Protection rating (IP) when unused	IP66
Protection rating IK code	IK10
Approvals	
Vertical load, small area	to 3,000 N
Vertical load, large area	to 15,000 N