# Technical data sheet

## SOM clip, single

## Item number: 2124173



With plastic screws, so corrosion-protected, with slot for fastening with wood screws or 5 mm knock-in anchors.

HALOGEN FREE CE

PS Polystyrene

### Master data

| | |
|---|---|
| Item number | 2124173 |
| Type | 3080 LGR |
| Description 1 | SOM clip |
| Manufacturer | OBO |
| Dimension | 6-17mm |
| Colour | Light grey; RAL 7035 |
| Material | Polystyrene |
| Smallest sales unit | 50 |
| Unit of quantity | Piece |
| Weight | 0.926 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0282 kg CO2e / 1 Piece |

# Technical data sheet

## SOM clip, single

## Item number: 2124173

### Dimensions

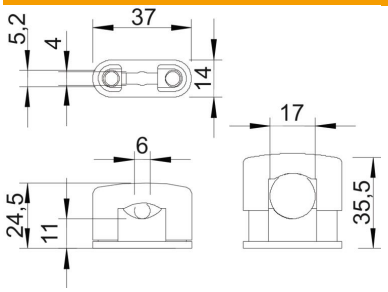


| | |
|---|---|
| Dimension b | 14 mm |
| Dimension b1 | 4 mm |
| Dimension b2 | 5.2 mm |
| Dimension d max. | 17 mm |
| Dimension d min. | 6 mm |
| Dimension H1 | 11 mm |
| Dimension H2 | 24.5 mm |
| Dimension H3 | 35.5 mm |
| Dimension L | 37 mm |

### Technical data

| | |
|---|---|
| Number of cables/pipes | 1 |
| Version for | Closed |
| Fastening type | Screw hole |
| Suitable in fire protection area | no |
| Halogen-free | yes |
| Plastic-covered | no |
| ROHS-conformant | yes |
| Bolt | M6 x 18 |
| Clamping range D, max. | 17 mm |
| Clamping range D, min. | 6 mm |
| UV-resistant | no |